



CBT SERIE

TANT BEAMWIDTH TECHNOLOGY™



CBT 100LA-LS Line Array Column Loudspeaker with Sixteen 50 mm (2 in) Drivers

Specifications:

15w@70v; 30w@100v Tap = 333
30w@70v; 60w@100v Tap = 167
60w@70v; 120w@100v Tap = 83
120w@70v; N/C@100v Tap = 42

: Specification and measurement referenced on-axis vertically and horizontally to the center point of the speaker baffle.



Enclosure: Fiberglass reinforced ABS cabinet with UL94-5VB flammability rating, painted aluminum grille


up/down tilt angles), continuously adjustable ± 15 degree tilt, as well as 5 degree fixed increment


EN54-24:2008 certified (Certificate No. 0359-CPR-00432), when installed with MTC-PC2 terminal panel cover. Cabinet UL94-5VB flammability rated. In accordance with the

MTC-CBT-FM1 flush-mount low-profile wall-mount bracket

100LA-LS Line Array Column Loudspeaker with Sixteen 50 mm (2 in) Drivers

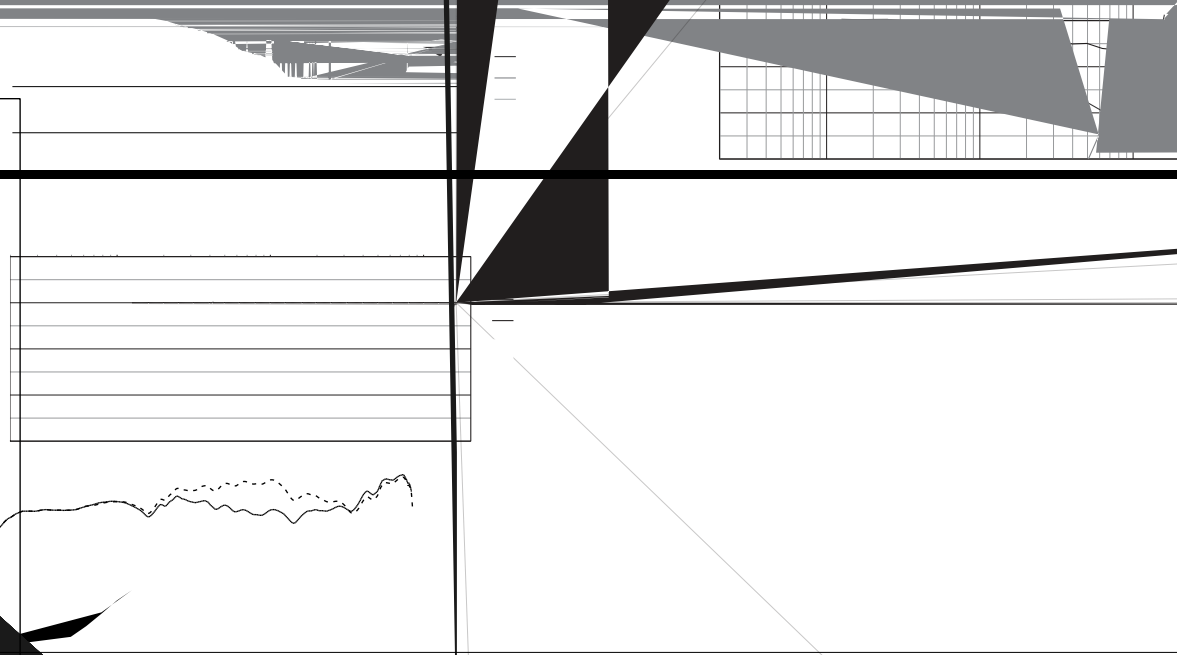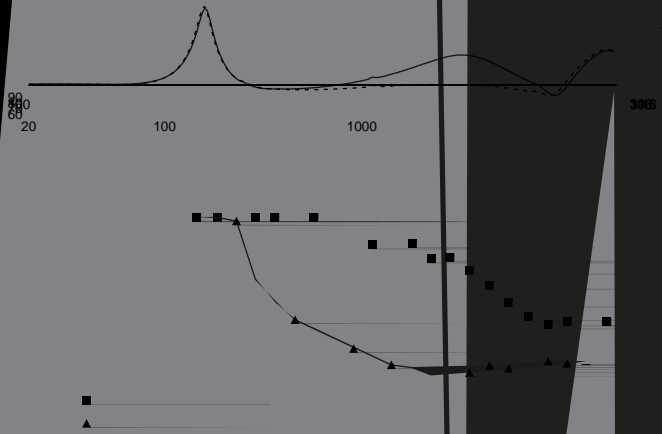

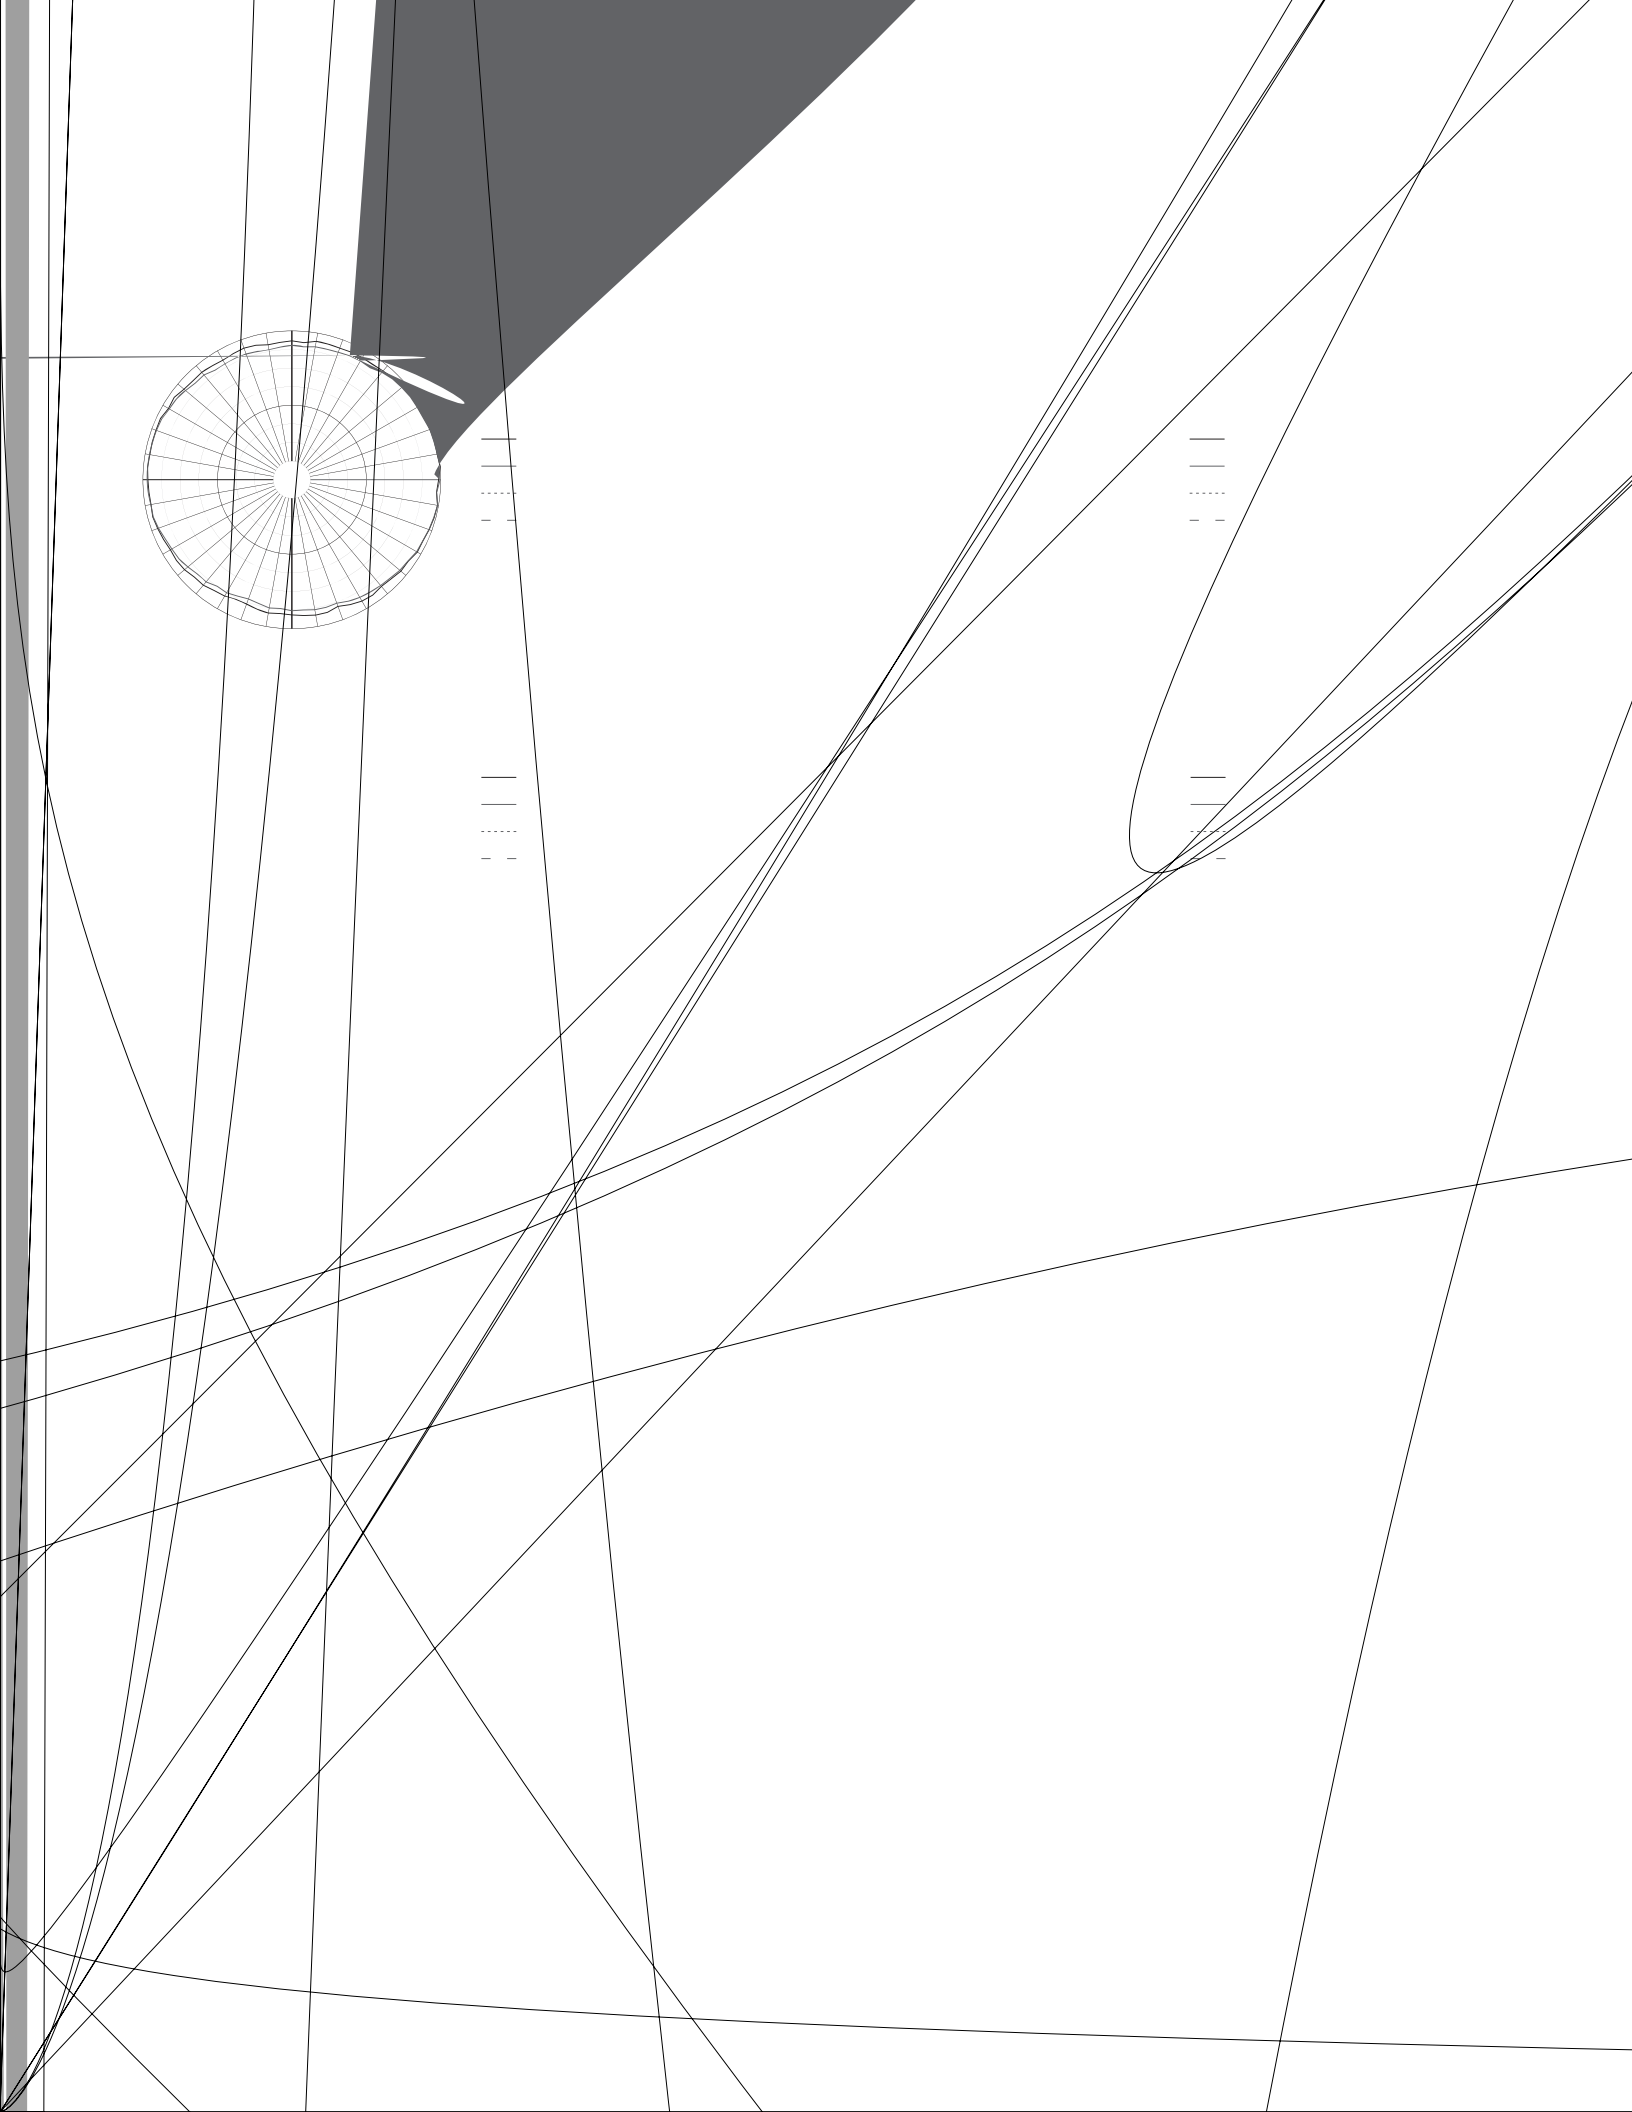



—
—
.....

