



Control[®] 47C/T

Two-Way 6.5" Coaxial Ceiling Loudspeaker with Extended Bass

Professional Series

Key Features:

- ▶ 120° beam spread
- ▶ 165 Hz (6.5")
- ▶ 25 Hz (1")
- ▶ 250 Hz (10")
- ▶ 8" / 70 / 100



(Shown with grille removed)

Applications:

47 / 100

165 (6.5")

25 (1")



8" / 70 / 100

Specifications:



System:	
(-10 dB):	55 - 20
(-3 dB):	75 - 17
2:	150
	75
	91
3:	120
():	6.5
():	7.9
	110 @ 1 (3.3) , 116
	8 ()
	60 , 30 , 15 , (& 7.5 @ 70)
	0.76 @ 60 , 0.70 @ 30 ,
	0.61 @ 15 , 0.58 @ 7.5
Transducers:	
	165 (6.5")
	25 (1") /
Enclosure:	
	2-12 G (2.5")
	()
	1480,
	2043, 90 & 70. 7232/
	1876.
	60849/ 60849.
	305
	(12 10.2)
	282 (11.1)
	/ 70 (2.75)
	5 (11)
	2 (600 1200 , 2)
	, 2
	-47
	-47
1	()
2	6 100
3	() 3 1 16

► Control 47C/T Two-Way 6.5" Coaxial Ceiling Loudspeaker with Extended Bass

Beamwidth:

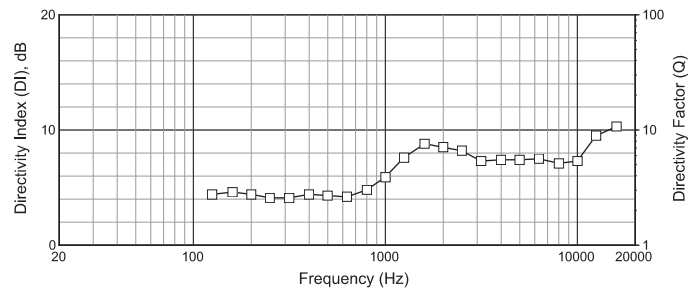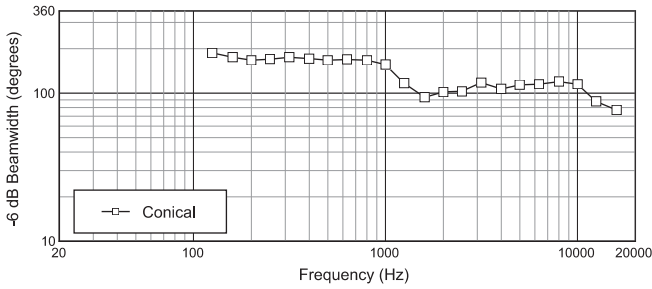

Frequency Response:

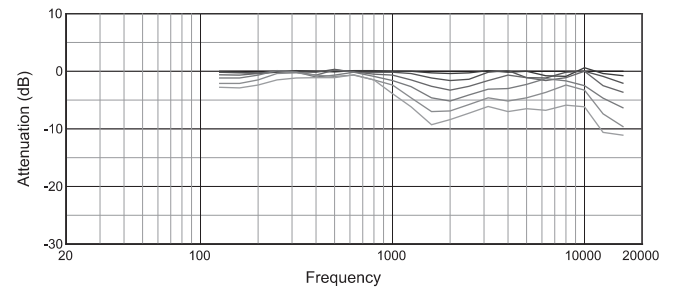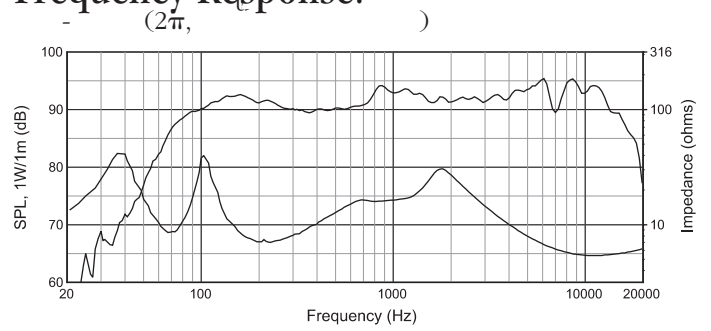

8500 2200
91329

A Harman International Company
© Copyright 2010 JBL Professional
www.jblpro.com

SS C47CT
CRP
03/10